

**The Nerrigundah Data Set: Soil Moisture Patterns,
Soil Characteristics and Hydrological Flux Measurements**

^{1,2}Jeffrey P. Walker, ¹Garry R. Willgoose, and ¹Jetse D. Kalma

1. *Department of Civil Surveying and Environmental Engineering
The University of Newcastle, Callaghan, NSW 2308, Australia*

2. *Now at Department of Civil and Environmental Engineering
The University of Melbourne, Victoria 30101, Australia*

Submitted to:

Water Resources Research
20 March 2001

Revised:

6 June 2001

Corresponding Author:

Jeffrey P. Walker

*Department of Civil and Environmental Engineering
The University of Melbourne, Victoria 30101, Australia*

Tel: +61 3 8344 6641

Fax: +61 3 8344 6215

E-Mail: cejpw@land.gsfc.nasa.gov

Abstract

This paper presents a data set that describes the spatial and temporal variability of soil moisture within the 6ha Nerrigundah catchment, located in a temperate region of eastern Australia. The data set includes: high resolution elevation data; high resolution (20m) near-surface soil moisture maps; soil moisture profile measurements at 13 locations, with one being applicable for one-dimensional modelling; soil moisture measurements from 4 different measurement devices at a single location; soil temperature profile measurements; soil heat flux and supporting meteorological measurements, including data obtained with 2 pluviometers and 4 collecting rain gauges; surface roughness measurements; soil information for 19 locations, including field measurements of saturated hydraulic conductivity; and catchment runoff measurements. This data is available on the World Wide Web at <http://www.civag.unimelb.edu.au/~jeff/nerrigundah>.

1. INTRODUCTION

Soil moisture in the top one to two metres of the earth's surface is widely recognised as a key parameter in numerous environmental studies, including meteorology, hydrology, agronomy and climate change studies. Although this thin layer of soil water may seem insignificant when compared to the total amount of water on the global scale, it is this soil water that controls the success of agriculture, and regulates partitioning of precipitation into runoff, evapotranspiration and ground water storage. Furthermore, soil moisture content is one of the few directly observable hydrological variables that play an important part in the water and energy budgets required in climate studies [Jackson, 1993]. However, as a result of the heterogeneity of soil properties, topography, land cover, evapotranspiration and precipitation, soil moisture is highly variable both spatially and temporally [Engman, 1991; Wood *et al.*, 1993; Western *et al.*, 1999].

This paper describes data from a field experiment investigating the spatial and temporal variability of soil moisture in the Nerrigundah catchment, New South Wales, Australia. The data set has been collected as a twin experiment to the series of field experiments investigating the spatial variability of soil moisture in the Tarrawarra catchment, Victoria, Australia [Western and Grayson, 1998]. This data set also complements European and North American field efforts, such as the Weiherbach project [Bronstert and Plate, 1997] and the Southern Great Plains experiments [Famiglietti *et al.*, 1999; Mohanty *et al.*, 2000], and extends the Global Soil Moisture Data Bank [Robock *et al.*, 2000].

The aim of experiments in the Nerrigundah catchment was to collect data applicable to soil moisture modelling in both a one-dimensional soil column and at the small catchment scale. The resulting data set includes high spatial and temporal resolution maps of near-surface soil moisture and a range of supporting information, including soil moisture profile, meteorological, runoff and soil data. Whilst we will continue to conduct our own analyses of this data set, we are making it available to the general research community so that it may be used to its fullest potential, and may provide unrestricted access to the much needed field data that land surface modellers require for evaluation studies.

These data sets have a variety of potential uses. Specific analyses we have conducted include: evaluation of data assimilation schemes in both one-dimensional [Walker *et al.*, 2001a] and three-dimensional [Walker *et al.*, 2001b] settings; evaluation of Synthetic Aperture Radar (SAR) data from the second European Remote Sensing (ERS-2) satellite for soil moisture estimation [Walker *et al.*, 2001c]; comparison of soil moisture point measurement techniques [Walker *et al.*, 2001d]; and calibration of hydrological model parameters with soil moisture, evapotranspiration, and runoff data [Wooldridge *et al.*, 2001].

2. CATCHMENT DESCRIPTION

The Nerrigundah experimental catchment is located in the Williams River catchment on a property called Nerrigundah, approximately 11km north-west of Dungog, New South Wales, Australia (32° 19' south; 151° 43' east). The catchment runs east to west with a relief of 27m and a catchment area of 6ha. Hillslopes are typically 11% with a range from 3% to 22%, and the main drainage line has an average slope of 9% with a range from

1% to 17% (Figure 1). The catchment has an elevation of approximately 110m Australian Height Datum (AHD) and is used for grazing of beef cattle. The catchment is vegetated mostly with natural grasses and has been cleared of timber for approximately 50 years. There were no external or man-made influences on the soil moisture or runoff in the catchment during the period of data collection.

Nerrigundah has a temperate climate with a mean annual summer dominant rainfall of 1000mm and a Class A pan evaporation of 1600mm. The maximum mean monthly rainfall occurs in January (147mm) and the minimum occurs in July (37mm), while the maximum mean monthly pan evaporation occurs in December (225mm) and the minimum occurs in June (60 mm). Mean summer maximum and minimum temperatures are 30°C and 16°C respectively and mean winter maximum and minimum temperatures are 15°C and 6°C respectively [*Australian Bureau of Meteorology, 1988*].

The catchment is situated on a variant of the Tillegra Erosional Landscape, which is located on the Wooton Beds. The Wooton Beds consist of sandstone, siltstone, claystone, shale, limestone and lavas, dating from the Carboniferous period [*New South Wales Department of Mines, 1966*]. In this soil landscape, the soils are usually shallow (30 to 90cm) consisting of well to moderately well drained Bleached Loams, Structured Loams and Lithosols on a siltstone parent material, with the occasional moderately deep to deep (55 to 290cm) patch consisting of well to imperfectly drained Soloths, Solodic soils and yellow Podzolic soils on sandstone [*Henderson, 2000*].

3. DATA SUMMARY

The Nerrigundah experimental catchment was instrumented from 12 October 1996 through 20 October 1998, for soil moisture content, soil temperature, runoff, rainfall and meteorological data. The continuously monitored soil moisture instrumentation (Figure 2) was located such that lateral redistribution of soil moisture would be negligible, and measurements for estimating the surface fluxes (precipitation/evapotranspiration) would be representative of the entire catchment. Therefore, the continuous instrumentation was located in a level location in the upper reaches of the catchment (Figure 1; soil profile sample/soil moisture sensor 2). Monitoring of the spatial variation in soil moisture data could not be performed economically using continuous instrumentation. Hence, the spatial and temporal variation of both near-surface soil moisture and soil moisture over the soil profile was extensively monitored during an intensive field campaign from 27 August 1997 to 22 September 1997. Monitoring of soil moisture profiles was continued from 22 September 1997 through 20 October 1998 on a less frequent basis. Soil moisture profiles were also measured on 22 August 1997 to provide background soil moisture values for the intensive field campaign.

3.1 Terrain Data

An accurate Digital Elevation Model (DEM) of the Nerrigundah catchment was generated from a Total Station field survey, with horizontal coordinates on the Australian Map Grid (AMG) and elevations on AHD. Approximately 4600 elevation data points were observed with an average spacing of 7.5m. In addition to elevation data for the experimental catchment and its surrounds, the survey located fences, buildings, dams, trees/shrubs, monitoring equipment and soil sample locations (Figure 1). Elevation data are

available as both the original x,y,z data and as interpolated onto a 20m \times 20m grid, on both the AMG and local coordinate system. The gridded elevation data corresponds with the near-surface soil moisture sampling grid, which is aligned with the natural axis of the catchment given by the orientation of the fence lines dissecting the catchment (Figure 1).

3.2 Near-Surface Soil Moisture Maps

Twelve near-surface soil moisture maps were collected on a 20m \times 20m grid (238 measurement sites per coverage) over the catchment during the 1 month intensive field campaign in August/September 1997. This data was collected using The University of Melbourne's Terrain Data Acquisition System (TDAS): an all terrain vehicle with a differential Global Positioning System (GPS) and hydraulic ram for insertion of the two-wire connector type Time Domain Reflectometry (TDR) probes used for measuring the near-surface soil moisture [Western *et al.*, 1996]. The TDR system used was the Soil Moisture Equipment Corporation TRASE® TDR, using the standard TRASE calibration to determine the volumetric soil moisture content from the measured dielectric constant over a probe length of 15cm. (The mention of trade and company names is for the benefit of the reader and does not imply an endorsement of the product.) Calibration of the TDR against gravimetric measurement of soil moisture indicated that data should be accurate to within $\pm 2.5\%$ v/v. The ERS-2 SAR data were collected coincidentally with two of the measurement dates, but these data are not available as part of the public data set. An example of the near-surface soil moisture map data is given in Figure 3.

3.3 Soil Moisture Profile Measurements

The soil moisture profile was monitored at 13 locations in the catchment using two-wire connector type TDR probes to the lesser of depth to bedrock or 100cm. Probes were inserted vertically for nominal lengths of 5, 10, 15, 20, 30, 40, 50, 60, 70, 80 and 100cm, yielding an average soil moisture measurement for the length of the probe. The TDR probes were permanently installed and the measurements made by attaching the balun and TRASE signal unit. These measurements were made coincident with the near-surface soil moisture mapping measurements during the intensive field campaign. The location of soil moisture profile measurement sites are shown in Figure 1.

In addition to the connector type TDR data, the one-dimensional soil moisture profile monitoring site located near the weather station (Figure 1; soil moisture sensor 2) was monitored using three-wire buriable type TDR probes, Virrib® soil moisture sensors and a Campbell Scientific CS615 water content reflectometer. Both the Virrib and CS615 soil moisture sensors provided a continuous monitoring of the soil moisture whilst both the connector and buriable type TDR measurements were made periodically. The horizontal layout of instrumentation at this site is given in Figure 4.

Virrib soil moisture measurements were made with 5 sensors installed horizontally at depths of 10, 15, 20, 30 and 40cm, providing soil moisture measurements over a layer thickness of 12cm [*Komin*, Technical Data]. These measurements were logged every 15 minutes. A single CS615 sensor was installed horizontally at a depth of 5cm, providing a soil moisture measurement over a layer thickness of approximately 4cm [*Campbell Scientific Inc.*, 1995]. These measurements were logged every 10 minutes. Buriable type

TDR probes were installed horizontally at depths of 5, 10, 15, 20, 30 and 40cm, providing an average soil moisture measurement over a layer thickness of approximately 4cm [*Soil Moisture Equipment Corp.*, 1989]. The connector type TDR probes gave an average soil moisture measurement over nominal probe lengths of 5, 10, 15, 20, 30 and 40cm. The minimum depths at which the Virrib and buriable type TDR probes could be installed without causing a loss of accuracy were 10cm [*Komin*, Technical Data] and 5cm [*Soil Moisture Equipment Corp.*, 1989] respectively. The vertically inserted connector type TDR probes were installed on 24 April 1997 and the Campbell Scientific CS615 sensor was installed on 8 May 1997. All other measurements commenced on 12 October 1996 and continued until 20 October 1998. An example of the soil moisture profile data is given in Figure 5 and a time series of the depth averaged soil moisture data in Figure 6. The differences between these various soil moisture measurements are discussed in *Walker et al.* (2001d).

3.4 Meteorological and Flux Measurements

Meteorological measurements were made with an automatic weather station which monitored: relative humidity and air temperature; soil temperature at 0.5, 1, 2, 4, 6, 8, 12, 16, 24, 32 and 40cm depths using thermocouples; soil heat flux at 2 and 12cm depths using soil heat flux plates; atmospheric pressure; rainfall; net all-wave radiation; and wind speed. Apart from rainfall, all measurements were made at 1 minute intervals, and the average was logged every ten minutes. Rainfall was recorded for each tip of the 0.2mm tipping bucket. Eddy correlation measurements of evapotranspiration were made on 6 days during the intensive field campaign.

A 1'6" (45cm) Parshall flume [*Working Group on Small Hydraulic Structures*, 1976] was installed at the catchment outlet to monitor surface runoff. Runoff was monitored by measuring the water level in a stilling well to the side of the flume with a water level pressure sensor. Water levels were scanned every minute and recorded if they varied by more than 2mm from the previous measurement.

A second pluviometer was located at the flume, and four collecting rain gauges were distributed throughout the catchment to check the spatial variability of rainfall. These data indicated that there was minimal spatial variability during the time period monitored. Collecting rain gauges were located at the weather station, flume, and one either side of the catchment at approximately half way between the flume and weather station. Collecting rain gauges were recorded approximately fortnightly from 31 December 1996. During the intensive field campaign in August/September 1997, collecting rain gauges were recorded every two to three days.

3.5 Other Data

Surface roughness measurements were made at 5 locations for each of two days (coincident with the ERS-2 overpasses) during the intensive field campaign in August/September 1997, using a 1m long drop pin profiler with a pin separation of 25mm. Two sets of 1m measurements were made in, north south, east west, and north-east south-west directions, at each of the 5 locations. The roughness measurements were made near soil moisture profiles 2, 5, 7, 8 and 9 (Figure 1). Surface roughness measurements provide a measure of the depression storage in the catchment when modelling soil moisture and runoff. A visual inspection of the Nerrigundah catchment indicated that the spatial

distribution of surface roughness was relatively uniform, apart from the main drainage line and steeper portions of the site. These portions were slightly rougher as a result of cattle hoof prints being more pronounced in areas subject to wetting.

Soil characterisation of the Nerrigundah catchment was undertaken from 19 minimally disturbed soil cores retrieved from throughout the catchment (Figure 1) using the soil coring capabilities of the TDAS [Western *et al.* 1996]. Core holes were refilled with a mixture of sand and bentonite so that no high conductivity flow paths were created. As the majority of soil within the Nerrigundah catchment has a depth of less than 60cm, these soil cores gave a view of the entire soil profile at their individual locations.

The soil profile was described according to its horizons by the Northcote Factual Key Soil Classification System [Northcote, 1979]. The thickness of soil horizons was noted where identifiable, and each soil core dissected into its horizons for laboratory assessment. Where the A1 horizon was too shallow to give a sufficient soil sample for laboratory testing by itself, the A1 and A2 horizons were combined. The laboratory testing for all 19 cores included bulk density, porosity, organic matter content (by the method of ignition) and particle size analysis (by dry sieving and laser diffraction). In addition, the quartz content was determined (by x-ray diffraction) for the core taken near the weather station. Saturated hydraulic conductivity was estimated in the field using a Guelph permeameter and a double ring infiltrometer near the soil sample locations.

In addition to soil depth measurements at soil sample and soil moisture profile monitoring sites, soil depth was determined by probing with a 6mm steel rod on a 40m ? 40m grid during a period when the soil was moist. The bottom of the B horizon

could be detected by a sudden large change in force needed to insert the probe. The grid was coincident with that used for near-surface soil moisture measurements during the intensive field campaign. Additional measurements were made on a 20m ? 20m grid for the area in the vicinity of the main drainage line.

4. DATA AVAILABILITY

Apart from the SAR data, all of the data described above are available via the World Wide Web at <http://www.civag.unimelb.edu.au/~jeff/nerrigundah>. The web site provides all the information needed for interpretation of these data, along with general information on the Nerrigundah catchment, photographs of the landscape and sampling methods, and links to a detailed description and analyses of the data. Due acknowledgement in any publication or presentation arising from the use of these data is required.

5. ACKNOWLEDGEMENTS

The Nerrigundah catchment is owned by John and Margaret Russell who have provided free access to their land and willing cooperation throughout the project. Rodger Grayson and Andrew Western are acknowledged for providing the TDAS and for many insightful discussions on data collection. Assistance in the field has been provided by Lyndon Bell, Rodger Grayson, Greg Hancock, André Kable, Michael Kendal, Andrew Krause, Hemantha Perera, Mark Scanlan, Mark Thyer, Wendy Walker, Andrew Western, Craig Wood and Scott Wooldridge.

6. REFERENCES

- Australian Bureau of Meteorology, *Climatic Atlas of Australia*. Australian Government Printing Service, Canberra, Australia, 67pp., 1988.
- Bronstert, A. and E. J. Plate, Modelling of Runoff Generation and Soil Moisture Dynamics for Hillslopes and Micro-Catchments. *Journal of Hydrology*, 198: 177-195, 1997.
- Campbell Scientific Inc., *CS615 Water Content Reflectometer Instruction Manual*. Campbell Scientific Inc., Logan, USA, 8pp., 1995.
- Engman, E. T., Application of Microwave Remote Sensing of Soil Moisture for Water Resources and Agriculture. *Remote Sensing of Environment*, 35: 213-226, 1991.
- Famiglietti, J. S., J. A. Devereaux, C. Laymon, T. Tsegaye, P. R. Houser, T. J. Jackson, S. T. Graham, M. Rodell and P. J. van Oevelen, Ground-Based Investigation of Spatial-Temporal Soil Moisture Variability Within Remote Sensing Footprints During SGP97. *Water Resources Research*, 35(6): 1839-1851, 1999.
- Henderson, L. E., *Soil Landscapes of the Dungog 1:100 000 Sheet*. Department of Land and Water Conservation, Sydney, 2000.
- Jackson, T. J., III Measuring Surface Soil Moisture Using Passive Microwave Remote Sensing. *Hydrological Processes*, 7: 139-152, 1993.
- Mohanty, B. P., T. H. Skaggs and J. S. Famiglietti, Analysis and Mapping of Field-Scale Soil Moisture Variability Using High Resolution Ground-Based Data During the

- Southern Great Plains 1997 (SGP97) Hydrology Experiment. *Water Resources Research*, 36(4): 1023-1031, 2000.
- New South Wales Department of Mines, Newcastle 1:250000 Geological Series Map Sheet S1 56-2, 1966.
- Northcote, K. H., *A Factual Key for the Recognition of Australian Soils*, 4th Ed., Rellim Technical Publications, Glenside, South Australia, 123pp., 1979.
- Robock A., K. Y. Vinnikov, G. Srinivasan, J. K. Entin, S. E. Hollinger, N. A. Speranskaya, S. Liu and A. Namkhai, The Global Soil Moisture Data Bank. *Bulletin of the American Meteorological Society*, 81(6): 1281-1299, 2000.
- Soil Moisture Equipment Corp., *Trase System 1 Operating Instructions*. Soil Moisture Equipment Corp., Santa Barbara, USA, 54pp., 1989.
- Walker, J. P., G. R. Willgoose, and J. D. Kalma, One-Dimensional Soil Moisture Profile Retrieval by Assimilation of Near-Surface Measurements: A Simplified Soil Moisture Model and Field Application. *Journal of Hydrometeorology*, In Press, 2001a.
- Walker, J. P., G. R. Willgoose, and J. D. Kalma, Three-Dimensional Soil Moisture Profile Retrieval by Assimilation of Near-Surface Measurements: Simplified Kalman Filter Covariance Forecasting and Field Application. *Water Resources Research*, In Preparation, 2001b

- Walker, J. P., P. R. Houser, and G. R. Willgoose, Active Microwave Remote Sensing for Soil Moisture Measurement: A Field Evaluation Using ERS-2. *Hydrological Processes*, In Preparation, 2001c.
- Walker, J. P., G. R. Willgoose, and J. D. Kalma, In-Situ Measurement of Soil Moisture: A Field Comparison of Techniques. *Soil Science Society of America Journal*, In Preparation, 2001d.
- Western, A. W., and R. B. Grayson, The Tarrawarra Data Set: Soil Moisture Patterns, Soil Characteristics and Hydrological Flux Measurements. *Water Resources Research*, 34(10): 2765-2768, 1998.
- Western, A. W., R. B. Grayson, G. Blöschl, G. Willgoose, and T. A. McMahon. Observed spatial organisation of soil moisture and relation to terrain indices. *Water Resources Research*, 35(3): 797-810, 1999.
- Western, A. W., J. P. Tyndale-Biscoe, and G. A. Moore, Terrestrially Based Acquisition of Terrain Data by Instrumented All Terrain Vehicle. *Water and Environment, 23rd Hydrology and Water Resources Symposium*, Hobart, Australia, 625-630, 1996.
- Wood, E. F., D. S. Lin, M. Mancini, D. J. Thongs, P. A. Troch, T. J. Jackson, J. S. Famiglietti, and E. T. Engman, Intercomparisons Between Passive and Active Microwave Remote Sensing and Hydrological Modeling for Soil Moisture. *Advances in Space Research*, 13(5): 167-176, 1993.

Wooldridge, S. A., J. D. Kalma, and J. P. Walker, The Importance of Soil Moisture Measurements for Conceptual Model Parameter Inference in Low-Yielding Ephemeral Catchments. *Environmental Modelling and Software*, In Review, 2001.

Working Group on Small Hydraulic Structures, M. G. Bos (Ed.), *Discharge Measurement Structures*. International Institute for Land Reclamation and Improvement Publication 20, Wageningen, The Netherlands. 464pp., 1976.

FIGURE CAPTIONS

Figure 1: Topography, location of monitoring equipment, and location of soil sampling sites in the Nerrigundah catchment. The approximate geographic location of the Nerrigundah catchment is indicated on the inset.

Figure 2: Diagrammatic illustration of the continuously monitored instrumentation set-up in the Nerrigundah catchment.

Figure 3: Near-surface soil moisture map of Nerrigundah catchment on 15 September 1997. The contours are for elevation in meters.

Figure 4: Diagrammatic illustration of the horizontal layout of soil moisture sensors for monitoring soil moisture at the weather station. Cables are indicated by a dashed line and measurement depths/probe lengths are indicated on the diagram.

Figure 5: Comparison of Virrib, connector type TDR, buriable type TDR and CS615 reflectometer soil moisture measurements at soil moisture monitoring site 2.

Figure 6: Time series of daily rainfall totals (solid line) and average soil moisture to a depth of 46cm at soil moisture monitoring site 2 from Virrib (dashed line), connector type TDR (squares) and buriable type TDR (circles). The shaded region indicates the period of intensive soil moisture monitoring.

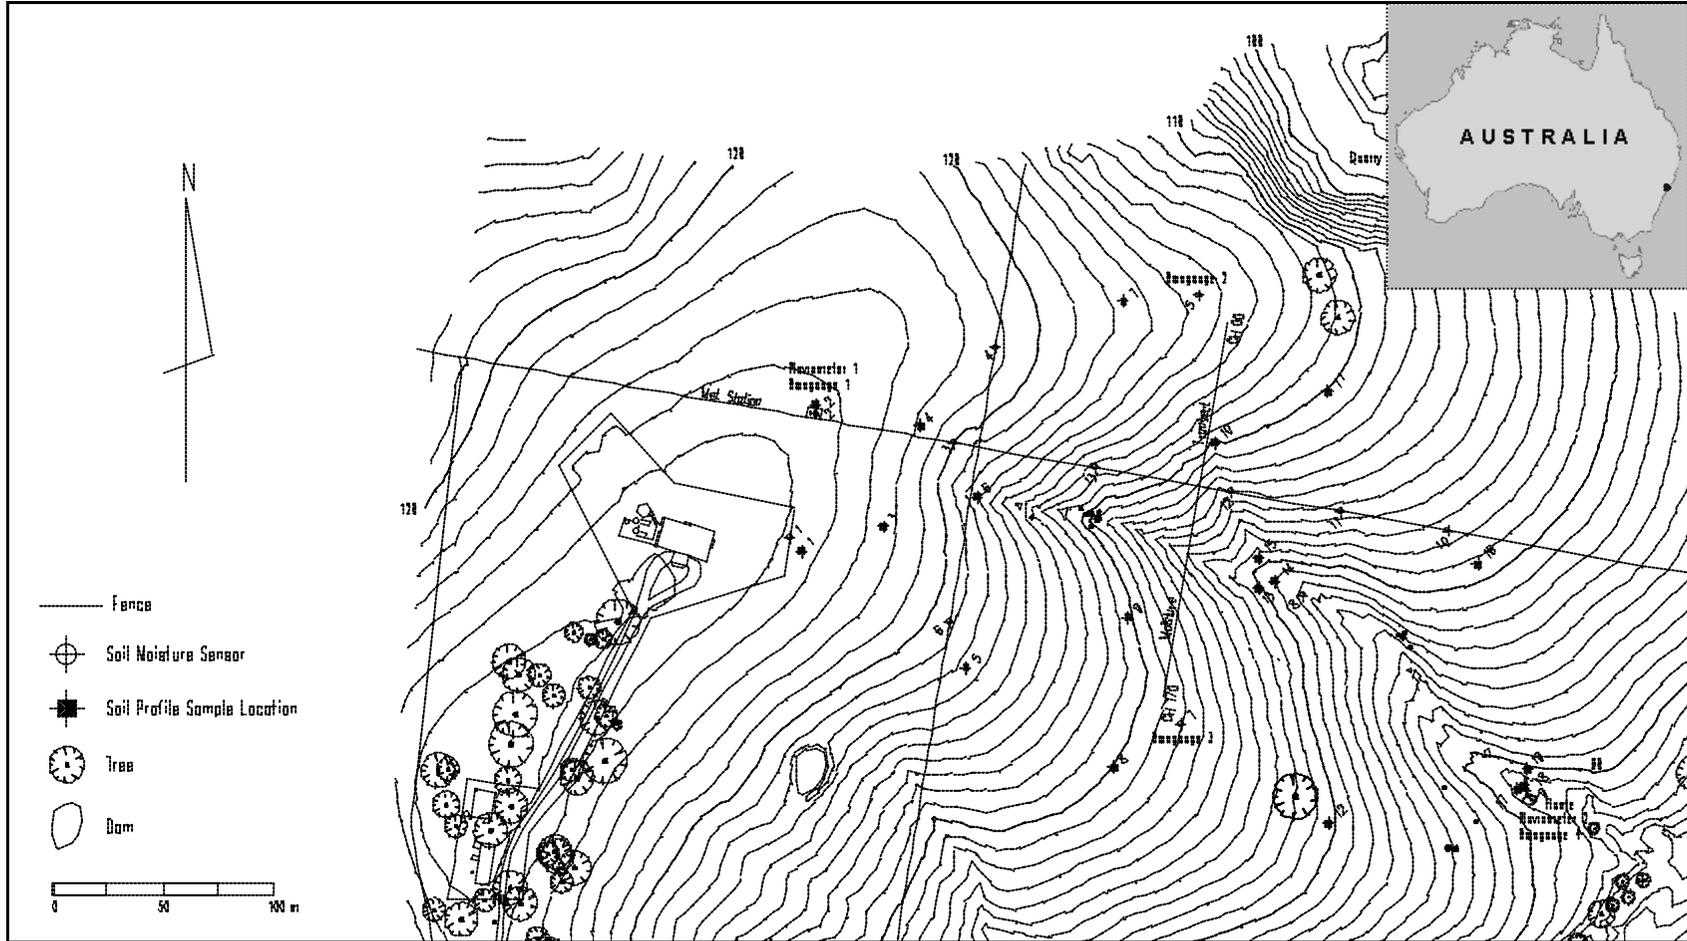


Fig 1

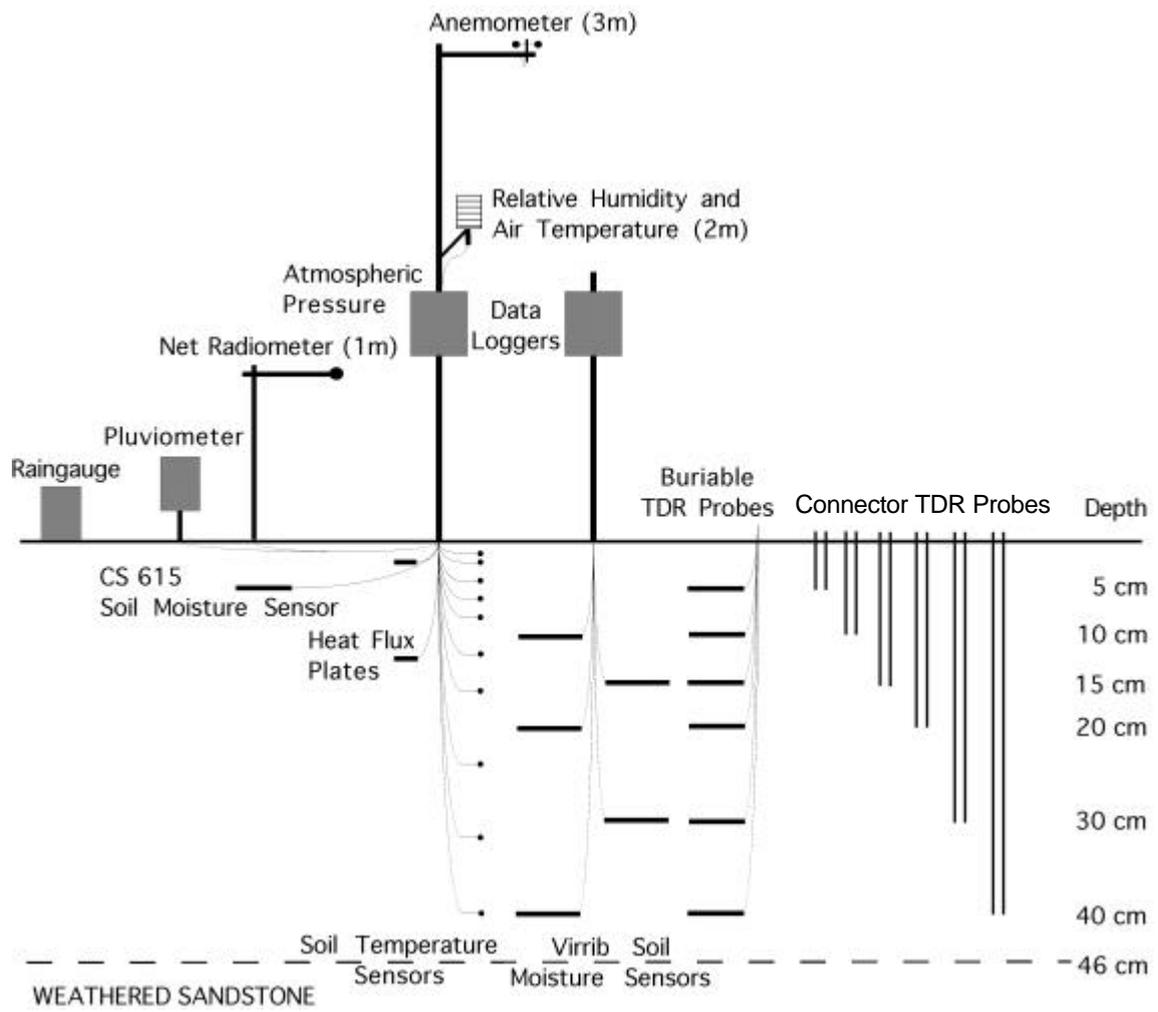


Fig 2




Fig 3

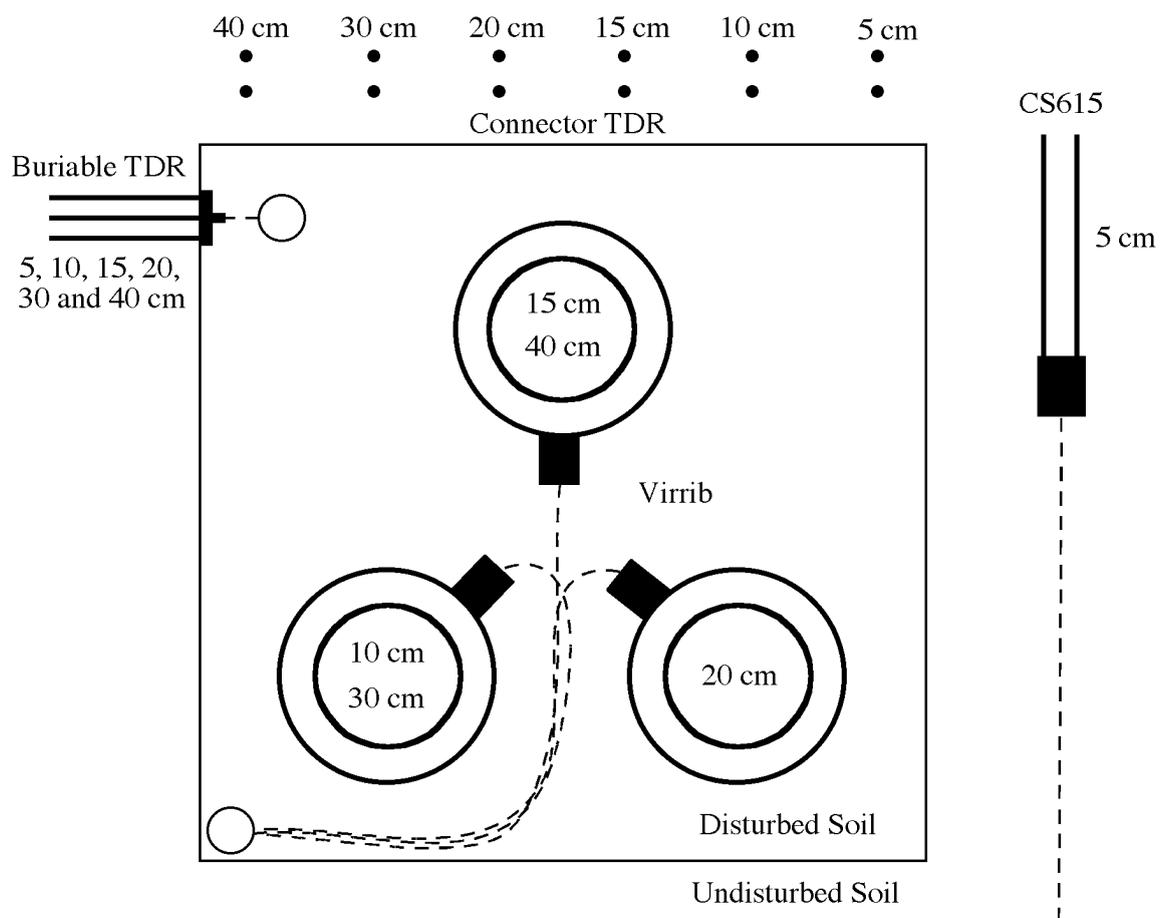


Fig 4

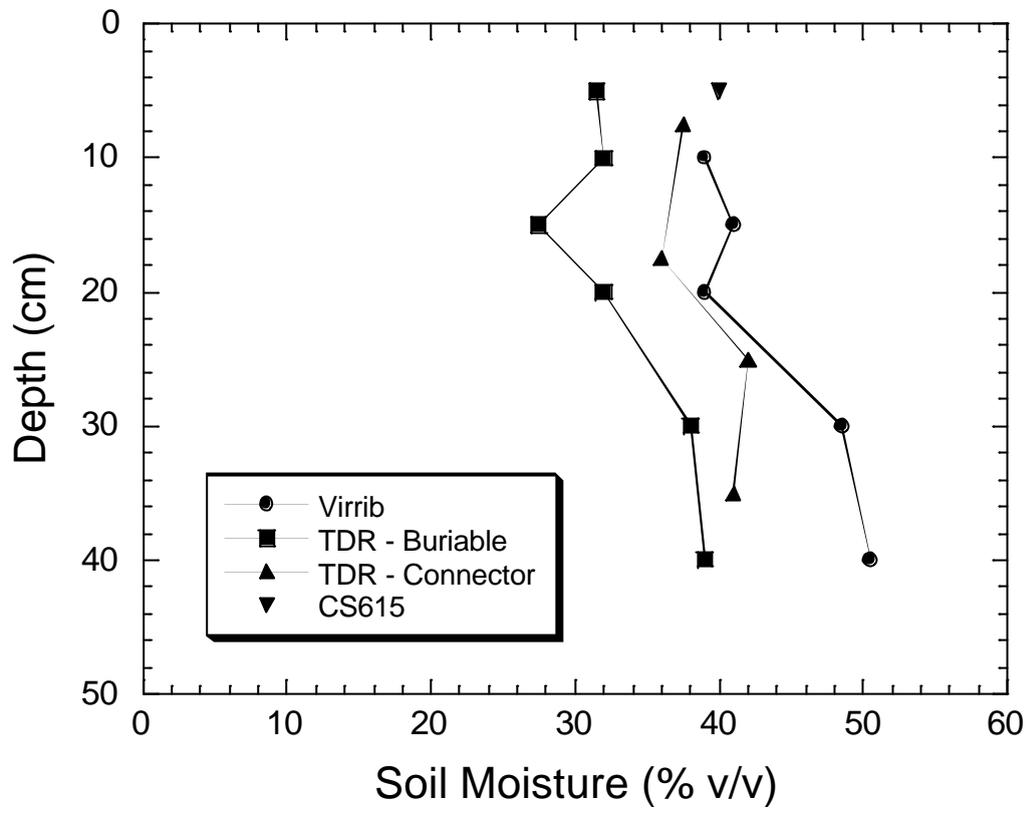


Fig 5

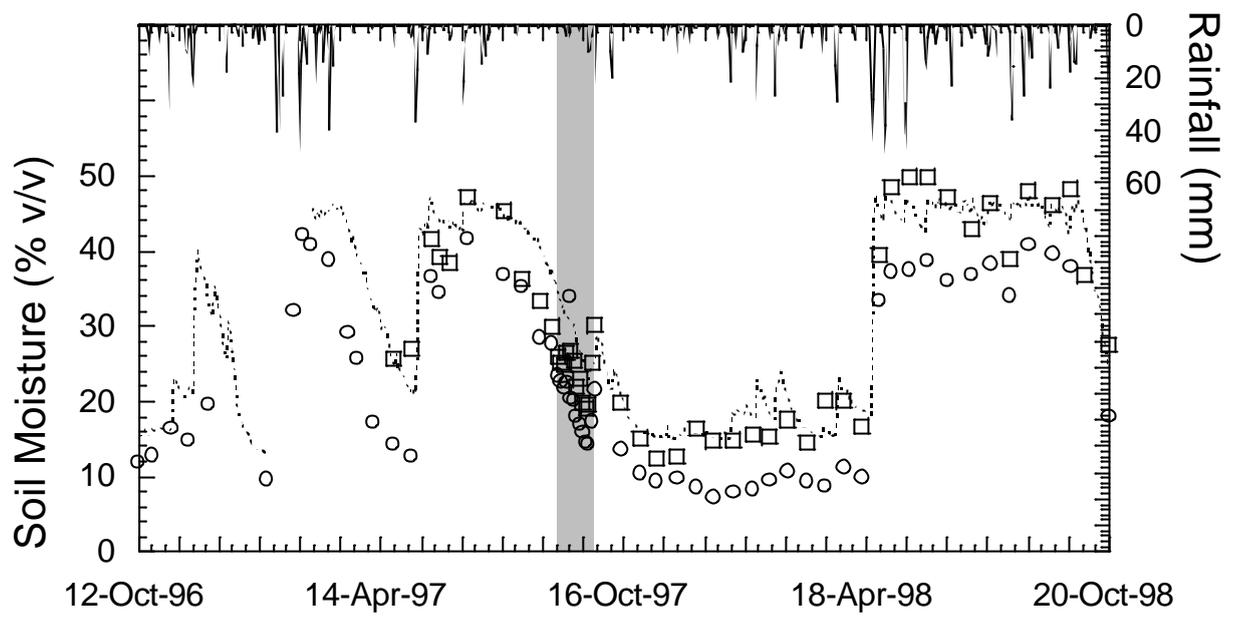


Fig 6